


S32 DOUBLE DOOR CONTROLLER

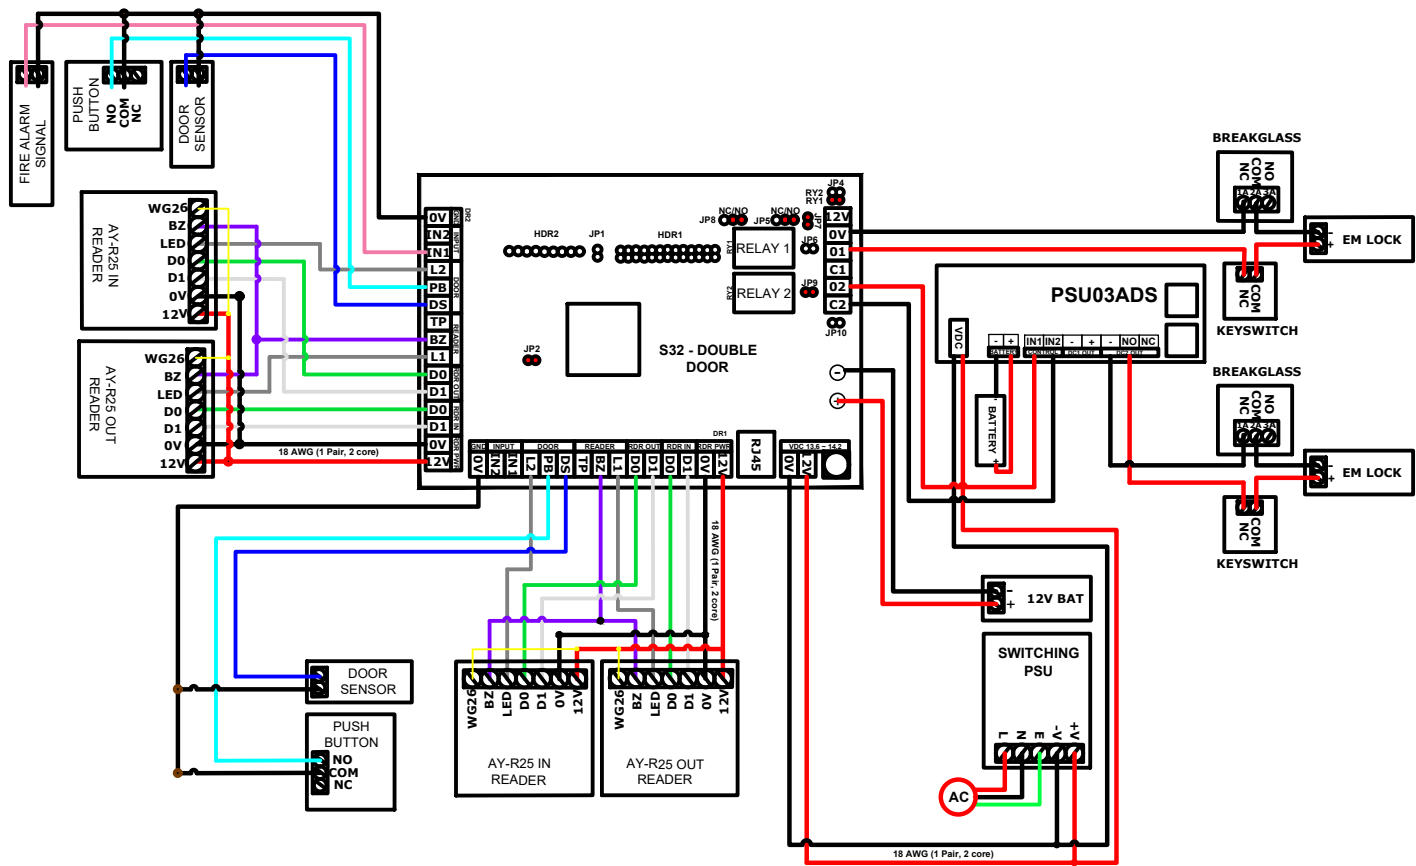

| READER COLOUR CODE | | |
|--------------------|-----------|--------|
| 1 | +12V | RED |
| 2 | 0V | BLACK |
| 3 | D1 | WHITE |
| 4 | D0 | GREEN |
| 5 | GREEN LED | GREY |
| 6 | BUZZ | PURPLE |
| 7 | WG26 | YELLOW |

| RJ-45 COLOUR CODE | | |
|-------------------|--------------|--------------|
| | DIRECT CABLE | CROSS CABLE |
| 1 | WHITE-ORANGE | WHITE-GREEN |
| 2 | ORANGE | GREEN |
| 3 | WHITE-GREEN | WHITE-ORANGE |
| 4 | BLUE | BLUE |
| 5 | WHITE-BLUE | WHITE-BLUE |
| 6 | GREEN | ORANGE |
| 7 | WHITE-BROWN | WHITE-BROWN |
| 8 | BROWN | BROWN |

| RELAY SETTING | | |
|-----------------|------------------------------------|------------------------------------|
| | 1 | 2 |
| POWER-LOCK | RY1-CLOSE JP6-OPEN JP9-CLOSE | RY2-CLOSE JP6-OPEN JP9-OPEN |
| DRYCONTACT-LOCK | RY1-OPEN JP6-CLOSE JP9-CLOSE | RY2-OPEN JP6-CLOSE JP9-CLOSE |
| NORMALLY OPEN | JP5 JP8 | JP5 JP8 |

SWITCHING POWER SUPPLY
 Input Controller supply 13.8V 4A
 Output Controller supply 12V 2A

POWER CABLE TYPE
 — 18 AWG 2 Core

DATA CABLE TYPE
 — 22 AWG