




Functions and Features

- MCBF : 6,000,000 opening and closing cycles
- Open the barrier gate by motor wheel when power off, automatically reset after power on
- Running speed 2.5s ~ 6s
- Curved crank arm three-link movement structure, the operation is stable
- Auto reverse function with Rubber Protector on Arm to Protect Vehicles
- Arm direction can be quickly interchanger left or right
- Arm swing out function, when the vehicle hit the barrier gate, the arm can be swing out to avoid further damage on vehicle and machine core
- Safe and reliable for use on all vehicles with long and high vehicles
- Built-in LED line on Arm and Arrow Indicator on Boy Gate to enhance vehicle guidance and ensure safe.

Barrier Arm :

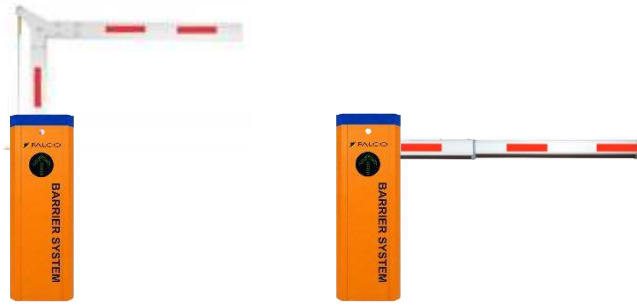

Articulated Arm (MX-330L)

Telescopic Arm

Spesification :

Packaging measurement	975mm*335mm*230mm
Working temperature	-25°C ~ 60°C
Input voltage	24/100/240VAC
Frequency	50~60Hz
Humidity	≥ 85%
Power Consumption	150 Watt
Rate Current	9.5A
Rate Torque	59.6 Nm
No-Load Speed	1.850 rpm
Protection System	IP54
Running speed	2.5s ~ 6 second
MCBF	6,000,000 cycles
Adaptation Arm	4 Meter Arm (Optional 6 Meter)
Environment	Indoor and Outdoor

Dimension :

