


S32 DOUBLE DOOR CONTROLLER

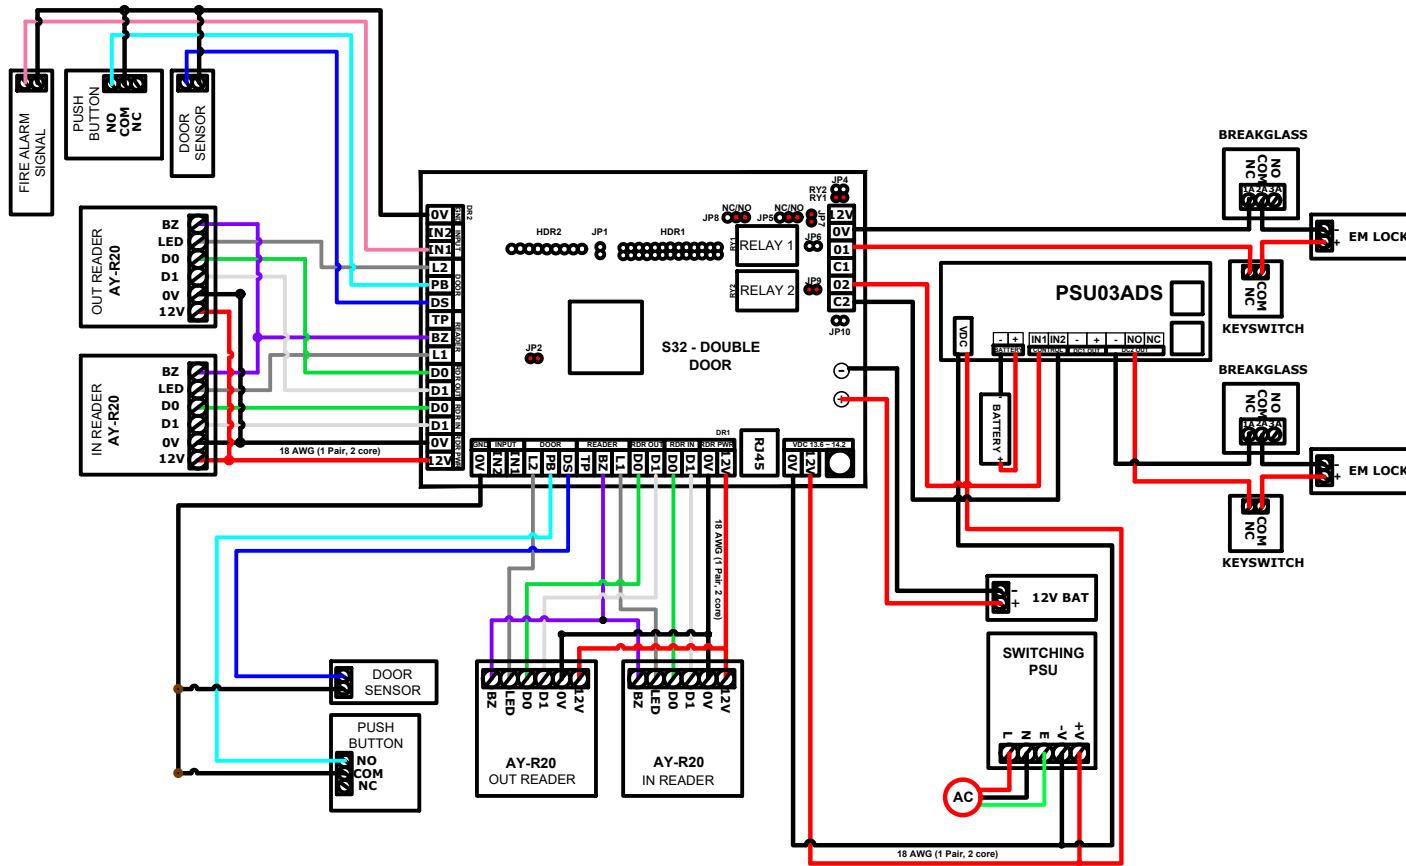

READER COLOUR CODE		
1	+12V	RED
2	0V	BLACK
3	D1	WHITE
4	D0	GREEN
5	LED	GREY
6	BUZZER	PURPLE

RJ-45 COLOUR CODE		
	DIRECT CABLE	CROSS CABLE
1	WHITE-ORANGE	WHITE-GREEN
2	ORANGE	GREEN
3	WHITE-GREEN	WHITE-ORANGE
4	BLUE	BLUE
5	WHITE-BLUE	WHITE-BLUE
6	GREEN	ORANGE
7	WHITE-BROWN	WHITE-BROWN
8	BROWN	BROWN

RELAY SETTING		
	1	2
POWER-LOCK	RY1-CLOSE JP6-OPEN JP9-CLOSE	RY2-CLOSE JP6-OPEN JP9-OPEN
DRYCONTACT-LOCK	RY1-OPEN JP6-CLOSE JP9-CLOSE	RY2-OPEN JP6-CLOSE JP9-CLOSE
NORMALLY OPEN	JP5 JP8	JP5 JP8

SWITCHING POWER SUPPLY
 Input Controller supply 13.8V 4A
 Output Controller supply 12V 2A

POWER CABLE TYPE
 18 AWG 2 Core

DATA CABLE TYPE
 22 AWG